

Installation & Care Instructions



- Thank for purchasing an Aqualux Lighting product.
- Please follow these instructions carefully.
- Your warranty and safety depends on it.
- All wiring must be in accordance with local regulations.
- If a fault or failure occurs, please contact Aqualux to arrange servicing.
- It is recommended to wash the luminaire with fresh water from time to time to stop salt and corrosive elements building up.
- Do not attempt to service the product.

YOUR WARRANTY RELIES ON CORRECT INSTALLATION & CARE.

Check product label for correct power requirements.
 Do not connect to mains (240V).
 Do not "hot-plug" lighting fixture - i.e. do not connect to energised power supply.
 Ensure cable termination is fully sealed and all joins are heat-shrunked or encapsulated.
 Ensure cable glands are hand tightened and end caps secured after transit & installation.
 Do not attempt to field service Aqualux fittings without prior instruction.
 Do not look directly at LED light source - it will damage your eyes!
 For surface mount, a bead of silicone between surface and fitting is recommended.
 These notes must be observed for the Aqualux Warranty to apply.

AQL-565 / 24V DC

IP67

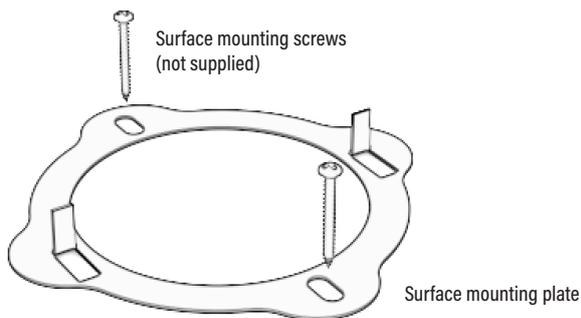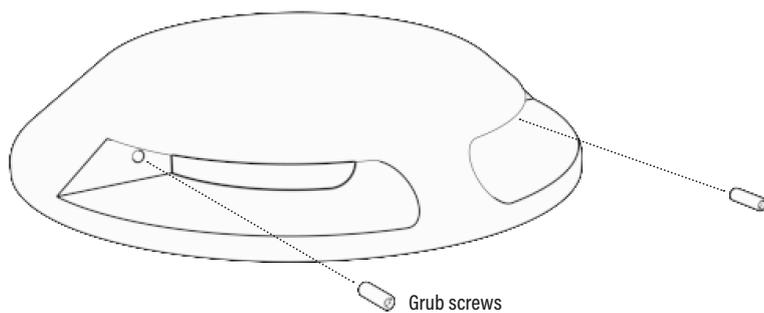

Do not remove QuickConnect adapter
 Warranty is void if this is cut off or removed.

Use fasteners appropriate for mounting surface
 Minimum SS304 recommended
 Expansion plugs or masonry anchors where required

Ensure fitting is flush with mounting surface
 Plate tabs to be fully inserted into body slots

Tighten fixing grub screws
 0.9nm ~ 1.2nm torque

