


AQL-600 Prism Wall Downlight

A simple prism shaped wall light with a single light output which can be faced down or up.



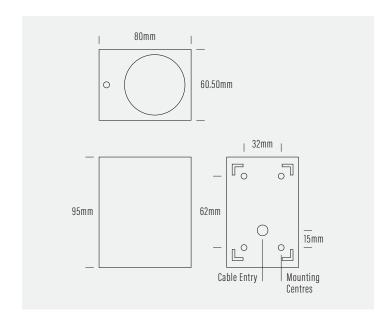

Specifications

Product	AQL-600
Product Code	See table on right
Construction Material	Cast Aluminium & Powder Coat
Cable	Terminal Block
IP Rating	IP54
Warranty	3 Year Aqualux Warranty
Body Colour	Black (A2) / White (A8)
Control Gear	24VDC or 240VAC
Rated Power	7W
Nominal Lumens	615 lm
CCT/Colour	3000K
Optical	70°
CRI	80
Dimming	PWM 10V Dimming / No Dimming 240V

Product Code

AQL-600-A8-K0073070T AQL-600-A8-F0073070T AQL-600-A2-K0073070T AQL-600-A2-F0073070T







Years Warranty



Installation Instructions

Product Code	Description
Installation Type	Wall / Surface Mounted
Input Voltage	220 - 240VAC 50Hz
IP Rating	54
Protection Class	Class 1 - Requires Earth
Luminaire Type	Integrated LED
Luminaire Wattage	1 x 7W LED

Installation Guidelines

- a. Ensure electrical circuits are disconnected and have no chance of accidental connection while you work.
- b. Loosen external grub screws using allen key supplied and remove backing plate.
- c. Ensure the intended install surface is smooth and free from deformations.
- d. Apply silicone around the back of the plate to ensure water does not pass into electrical connections.
- e. Fix the backing plate securely to the wall/surface using components supplied.
- f. Connect earth wire first, then live and then neutral. Check connections carefully.
- g. Attach light to the backing plate and reaffix grub screws.


Important


- Fitting must be installed by a licensed electrician in accordance with AS/NZS 3000.
- b. This fitting has no serviceable components. If the LED fails, do not attempt to replace.
- c. Disconnect all mains before installation.
- d. Do not use any other parts other than those supplied.
- e. Do not modify fitting in any way. This will void warranty and may result in damage or harm.


Information for end user

- a. Only operate the product if it is working correctly.
- b. Contact your installer if
- Light stops working
- Glass is broken or there is some other visible damage
- Smoke or other obvious fault has occurred
- Do NOT fasten or hang anything from light
- Do NOT let children climb or hang from the light

Installation Steps







O-Ring must be under washer, No reverse position



