


# AGL G Series

E27 LED Globes



## AQF-G-004-2700K / 2700K / E27

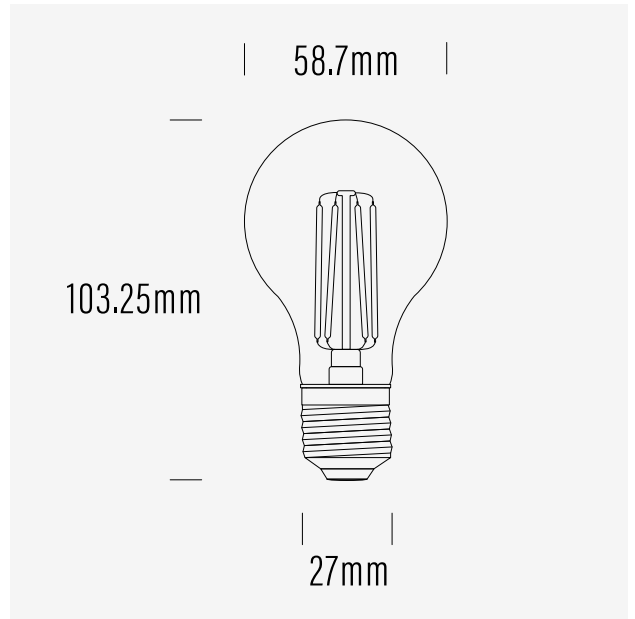

### Product Data

Product Code	AQF-G-004-2700K
Description	Aqualux G Series LED Lamp
Type	E27
Construction	PET Shell + LED + Aluminium Base
Warranty	3 Years

### Electrical Data

Input Voltage Range	24V AC/DC			
Nominal Voltage	24VDC			
Nominal Power	2W			
Nominal Current	83mA			
Input Voltage	-	-	<b>24VDC</b>	24VAC
Rated Power	-	-	<b>0.6</b>	1.8
Operating Frequency	-	-	-	50Hz
Max. no. of lamps on AQD24-040	-	-	-	-
Max. no. of lamps on AQD24-100	-	-	-	-
Max. no. of lamps on AQD24-240	-	-	-	-
Dimming Compatibility	PWM (PSU dependant)			
Wiring Scheme	Parallel			
Startup Time	< 0.5s			

### Mechanical & Thermal Data

Overall Length	103.25mm
Max Diameter	58.7mm
Lamp Base	E27
Weight	26g
Operating Temp Range	-20° - 60°
IP Rating	IP20

### Photometric Data

Nominal Flux (lm)	191		
Input Voltage	-	-	<b>24VDC</b> 24VAC
Input Power (W)	-	-	<b>0.6</b> 1.8
Rated Flux (lm)	-	-	<b>81</b> 173
Efficacy (lm/W)	-	-	<b>141</b> 97

CCT	2700K
CCT Description	Warm White
CRI (Ra)	93
CRI (R9)	64
TM-30 (Rf)	92
TM-30 (Rg)	98
SDCM	-
Peak Intensity (cd)	7.8
Nominal Beam Angle	-
Measured Beam Angle (FWHM)	325°


### Lifespan Data

L70	100,000h
Switching Cycles	100,000

### Compliance Data

EMI	Yes
RCM	N/A
Mercury Content	0mg

### Spectrum Test Report

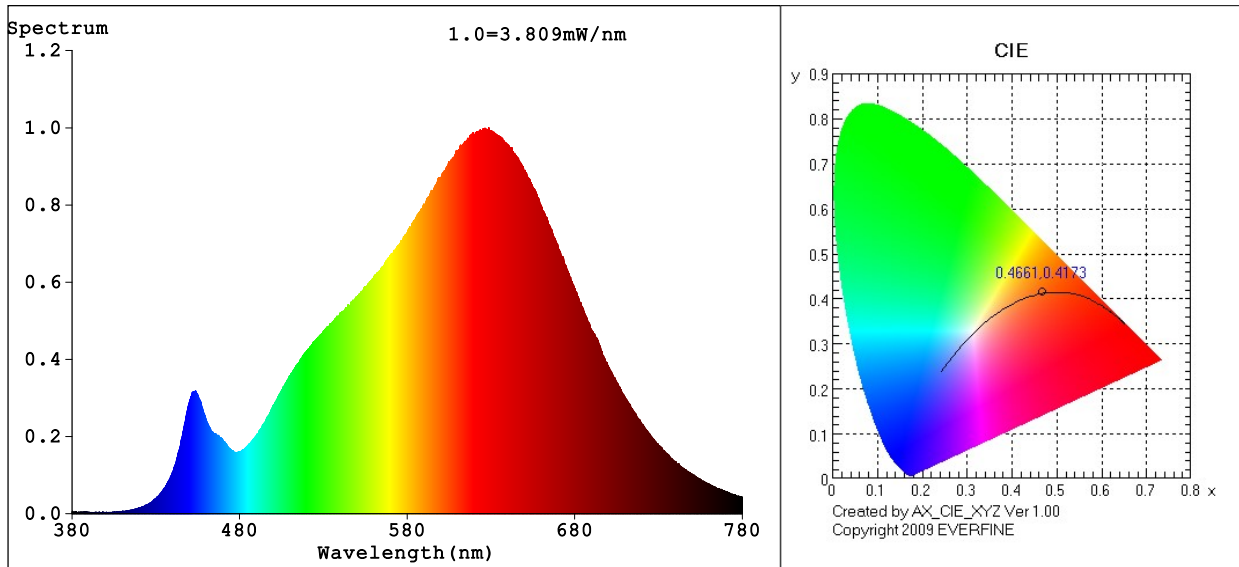

#### Color Parameters:

Chromaticity Coordinate:  $x=0.4661$   $y=0.4173$  /  $u'=0.2635$   $v'=0.5308$   
 CCT=2666K (Duv=0.0019) Dominant WL:Ld =583.8nm WL:Lc = --nm Purity=65.2%  
 Ratio:R=26.5% G=71.3% B=2.2%; Peak WL:Lp=628.6nm FWHM=151.9nm  
 Render Index:Ra=92.6 AvgR=89.6 TM30:Rf=93 Rg=98

R1 =92 R2 =95 R3 =97 R4 =93 R5 =92 R6 =95 R7 =93  
 R8 =83 R9 =61 R10=88 R11=94 R12=81 R13=93 R14=98 R15=88

#### Photo Parameters:

Flux = 172.5 lm Eff. : 97.06 lm/W Fe = 622.8 mW

#### Electrical parameters:

V = 23.991 V I = 0.08369 A P = 1.777 W PF = 0.8852







LEVEL:OUT WHITE:ANSI\_2700K

Status: Integral T = 800 ms Ip = 47896 (73%)

GBT5702

# TM30


View Angle: 2 Deg

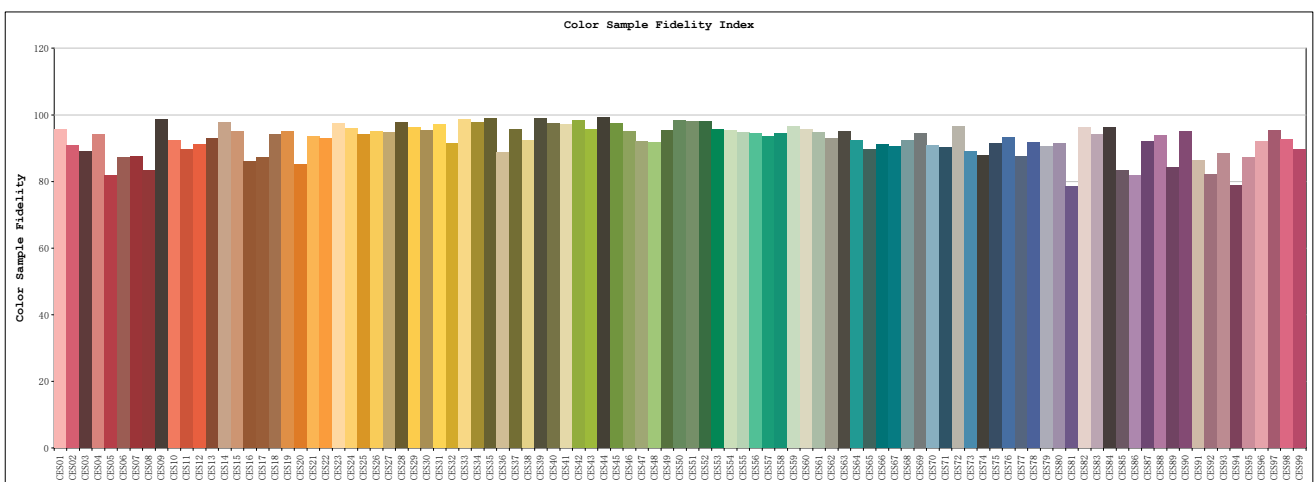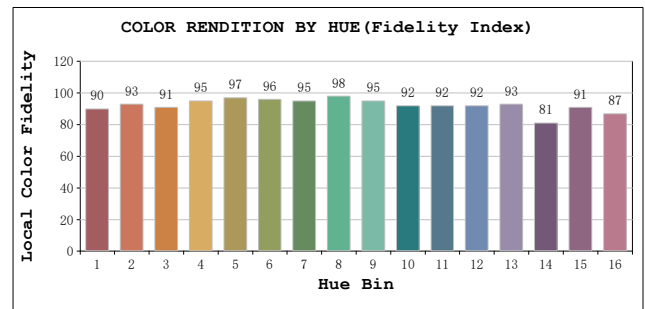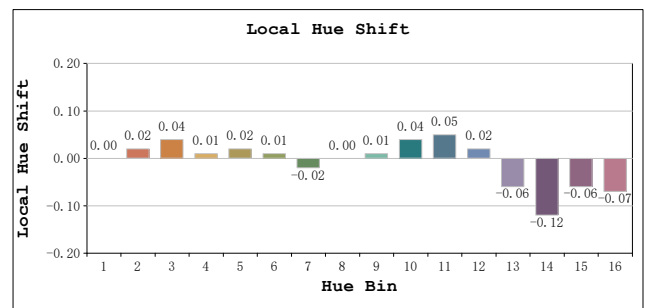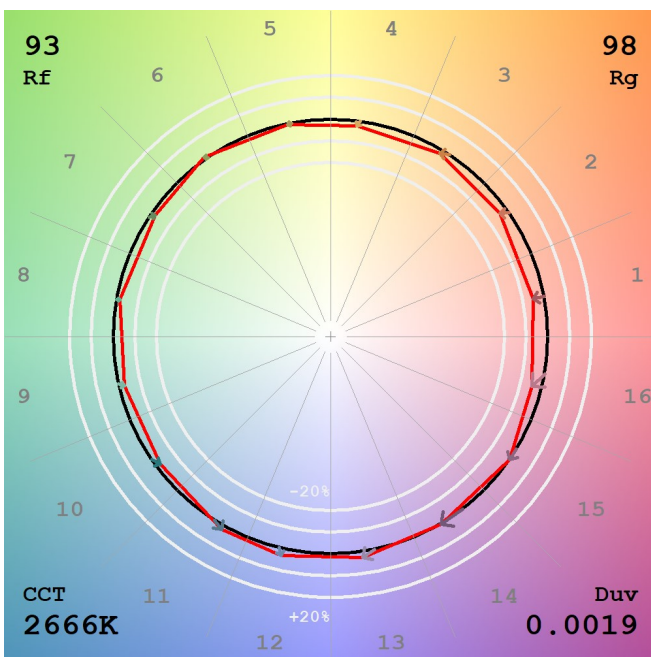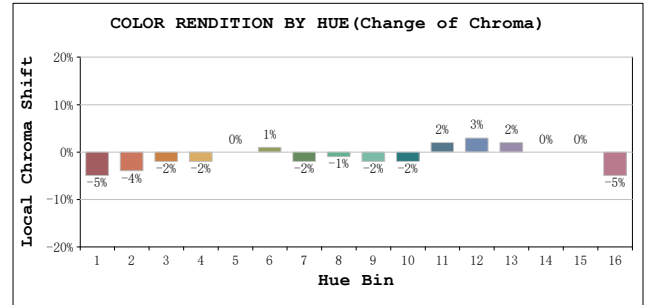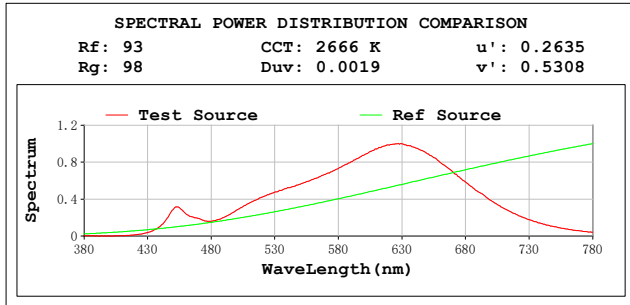

Model:AQF-G-004-2700K  
 Tester:EC  
 Temperature:25.3Deg  
 Manufacturer:AQUALUX

Number:AQF-G-004-2700K 24V AC  
 Date:2023-10-23 16:52:45  
 Humidity:65.0%  
 Remarks:24VAC

### Spectrum Test Report

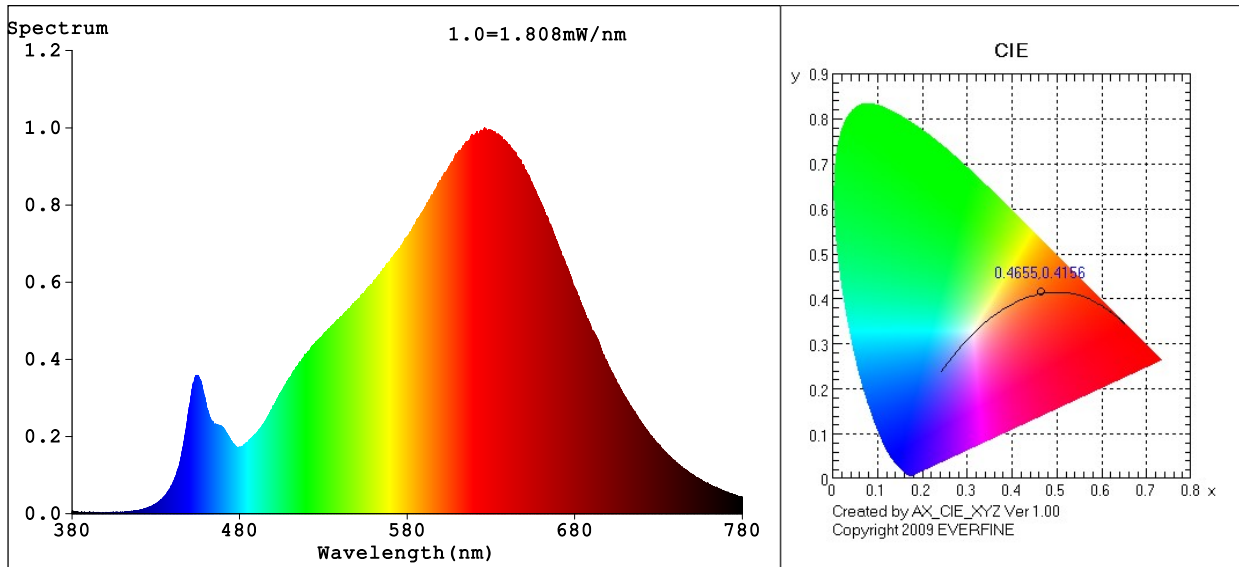

**Color Parameters:**

Chromaticity Coordinate:  $x=0.4655$   $y=0.4156$  /  $u'=0.2639$   $v'=0.5301$   
 CCT=2661K (Duv=0.0014) Dominant WL:Ld =584.0nm WL:Lc = --nm Purity=64.5%  
 Ratio:R=26.7% G=71.0% B=2.3%; Peak WL:Lp=626.2nm FWHM=150.7nm  
 Render Index:Ra=93.4 AvgR=90.6 TM30:Rf=92 Rg=98

R1 =94 R2 =96 R3 =98 R4 =93 R5 =93 R6 =96 R7 =93  
 R8 =84 R9 =64 R10=91 R11=94 R12=81 R13=94 R14=98 R15=90

**Photo Parameters:**

Flux = 80.93 lm Eff. : 140.84 lm/W Fe = 294.5 mW

**Electrical parameters:**

V = 24.003 V I = 0.02394 A P = 0.5746 W PF = 1.000






LEVEL:OUT WHITE:ANSI\_2700K

Status: Integral T = 1729 ms Ip = 48787 (74%)

**GBT5702**

# TM30

View Angle:2 Deg

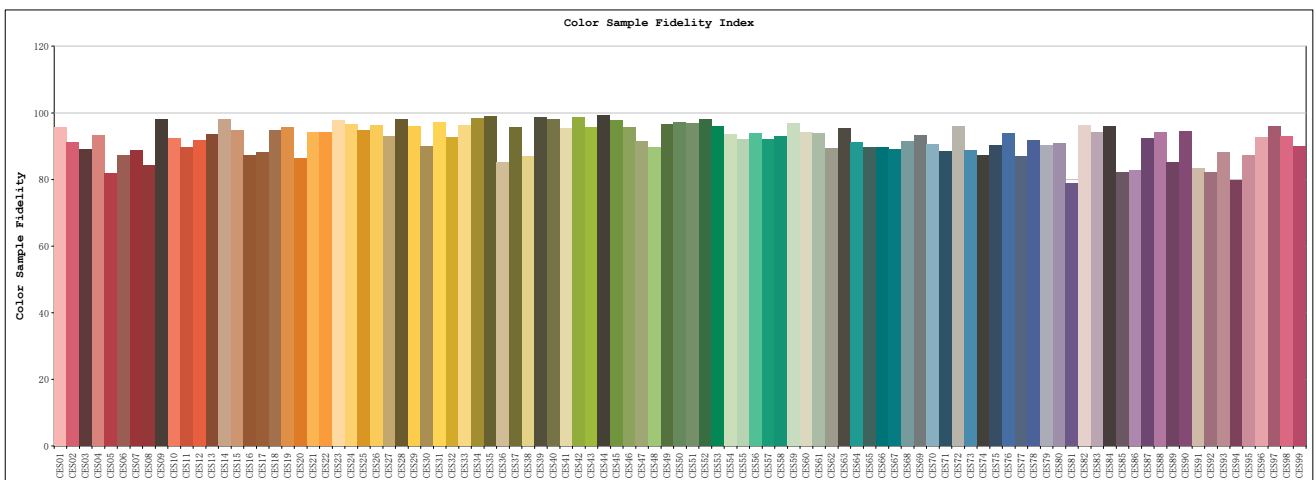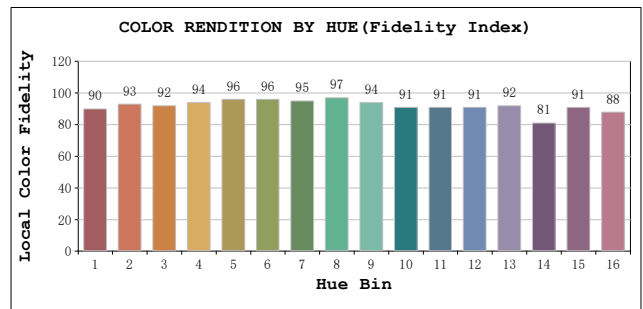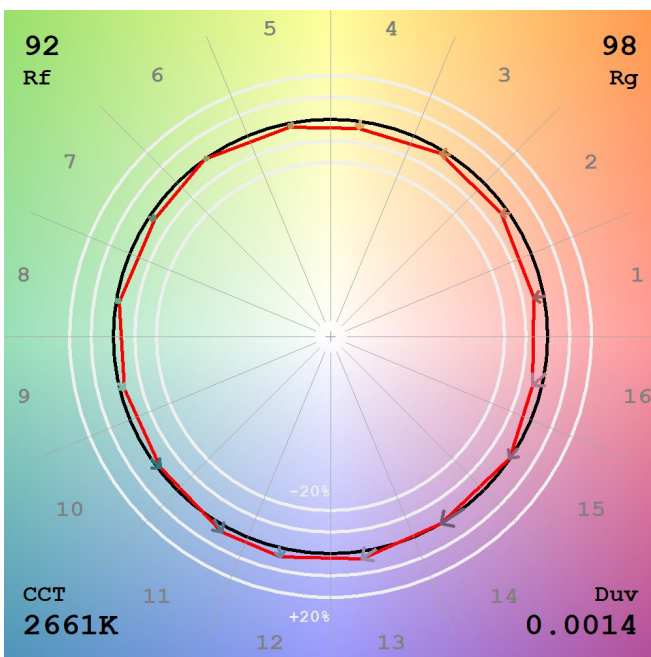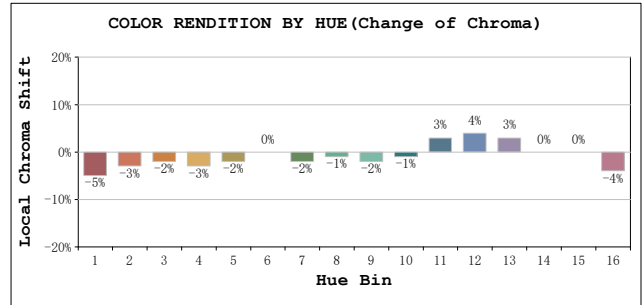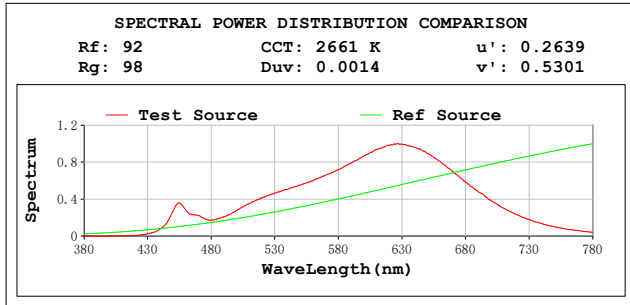



Model:AQF-G-004-2700K  
 Tester:EC  
 Temperature:25.3Deg  
 Manufacturer:AQUALUX

Number:AQF-G-004-2700K 24V DC  
 Date:2023-10-23 16:54:34  
 Humidity:65.0%  
 Remarks:24VDC

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:23.984V I:0.0227A P:0.5439W PF:1.0000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:68.1926x1 lm		
NAME: AQF-G-004-2700K	TYPE: E27 GLOBE	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: -
MFR.: AQUALUX	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	7.814	S/MH (C0/180)	5.51
NOMINAL POWER (W)	2	LOR (%)	100.0	S/MH (C90/270)	5.35
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	68.193	$\eta$ UP, DN (C0-180)	23.7, 26.0
NOMINAL FLUX (lm)	68.1926	CIE CLASS	DIFFUSE	$\eta$ UP, DN (C180-360)	24.0, 26.4
LAMPS INSIDE	1	$\eta$ up (%)	47.7	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	$\eta$ down (%)	52.3	CIBSE SHR MAX	1.35

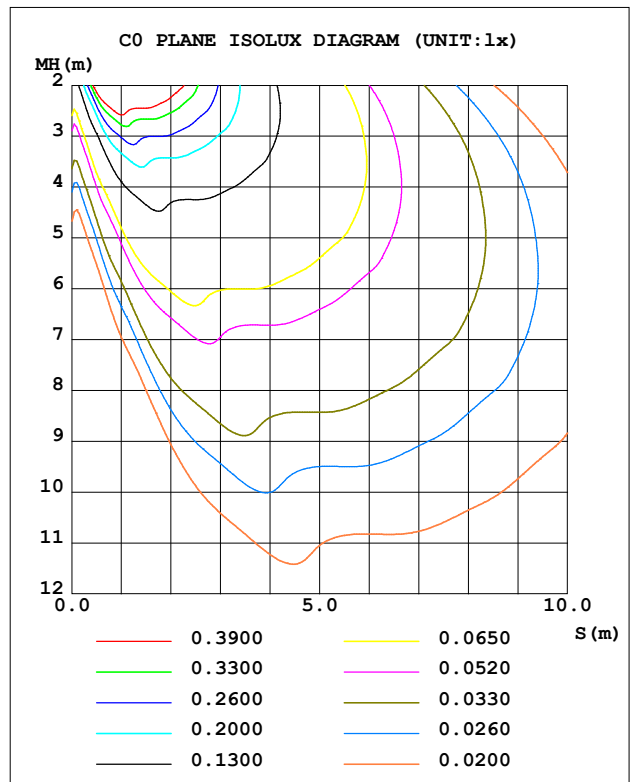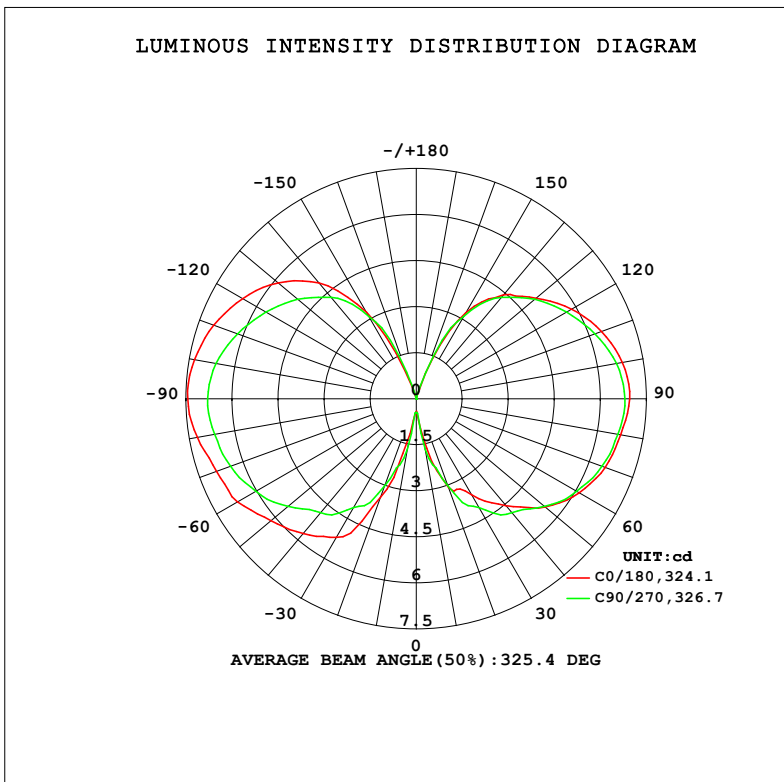

C Range: 0 - 180DEG  
 C Interval: 22.5DEG  
 Test Speed: MEDIUM  
 Temperature: 20°C  
 Operators: ELAINE  
 Test Date: 24 October 2023

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 2.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 3.100m [K=1.0000]  
 Remarks: AQF-G-004-2700K  
 2W / 2700K  
 24V DC

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1.231	1.469	1.680	0.9945	1.157	0.9945	1.680	1.469	0- 10	0.0755	0.0755	0.11,0.11
20	3.078	3.182	3.005	3.303	3.425	3.303	3.005	3.182	10- 20	0.7035	0.7790	1.14,1.14
30	3.611	4.284	4.094	5.153	5.212	5.153	4.094	4.284	20- 30	1.806	2.585	3.79,3.79
40	4.552	5.215	4.842	5.778	5.731	5.778	4.842	5.215	30- 40	2.949	5.535	8.12,8.12
50	5.485	6.182	5.453	6.206	6.176	6.206	5.453	6.182	40- 50	4.111	9.645	14.1,14.1
60	6.133	6.918	6.036	6.969	6.724	6.969	6.036	6.918	50- 60	5.315	14.96	21.9,21.9
70	6.549	7.354	6.438	7.273	6.919	7.273	6.438	7.354	60- 70	6.302	21.26	31.2,31.2
80	6.763	7.577	6.668	7.550	7.242	7.550	6.668	7.577	70- 80	6.986	28.25	41.4,41.4
90	6.956	7.761	6.795	7.805	7.442	7.805	6.795	7.761	80- 90	7.435	35.68	52.3,52.3
100	6.822	7.675	6.625	7.666	7.332	7.666	6.625	7.675	90-100	7.449	43.13	63.3,63.3
110	6.422	7.187	6.195	7.300	7.021	7.300	6.195	7.187	100-110	6.936	50.07	73.4,73.4
120	5.845	6.554	5.655	6.680	6.530	6.680	5.655	6.554	110-120	6.033	56.10	82.3,82.3
130	5.101	5.810	5.045	5.925	5.870	5.925	5.045	5.810	120-130	4.904	61.01	89.5,89.5
140	4.428	5.028	4.322	5.121	4.934	5.121	4.322	5.028	130-140	3.715	64.72	94.9,94.9
150	3.227	3.405	3.111	3.429	3.250	3.429	3.111	3.405	140-150	2.405	67.13	98.4,98.4
160	0.8734	0.9964	0.9237	0.6059	0.4443	0.6059	0.9237	0.9964	150-160	1.004	68.13	99.9,99.9
170	0.0155	0.0175	0.0127	0.0080	0.0036	0.0080	0.0127	0.0175	160-170	0.0621	68.19	100,100
180	0.0059	0.0087	0.0087	0.0063	0.0071	0.0063	0.0087	0.0087	170-180	0.0007	68.19	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 180DEG  
 C Interval: 22.5DEG  
 Test Speed: MEDIUM  
 Temperature:20°C  
 Operators:ELAINE  
 Test Date:24 October 2023

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 2.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:3.100m [K=1.0000]  
 Remarks: AQF-G-004-2700K  
 2W / 2700K  
 24V DC

**LUMINANCE LIMITATION CURVES**

<b>Test:U:23.984V I:0.0227A P:0.5439W PF:1.0000 Freq:0Hz</b> <b>UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:68.1926x1 lm</b>		
<b>NAME: AQF-G-004-2700K</b>	<b>TYPE: E27 GLOBE</b>	<b>WEIGHT:</b>
<b>SPEC.:</b>	<b>DIM.:</b>	<b>SERIAL No.: -</b>
<b>MFR.: AQUALUX</b>	<b>SUR.:</b>	<b>Shielding Angle:</b>

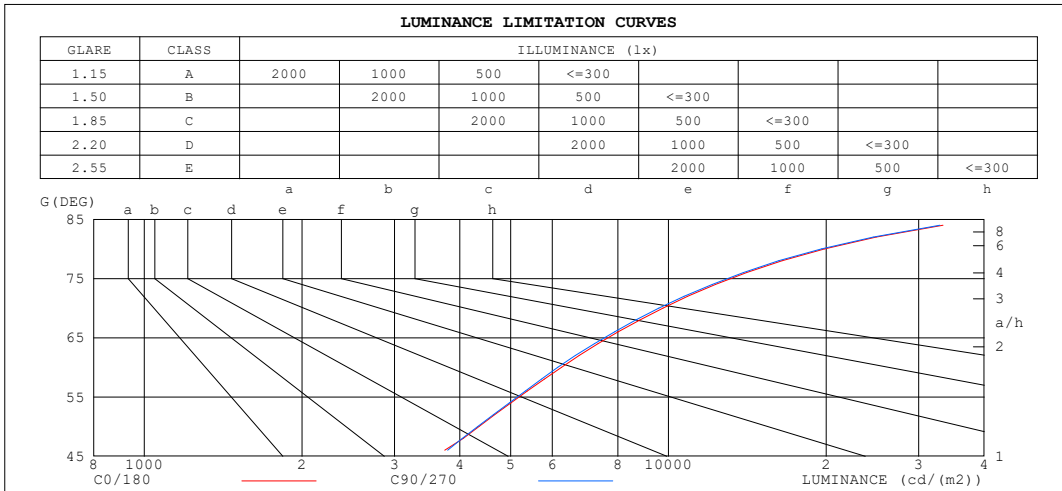

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	40044	39483
80	19841	19562
75	13080	12905
70	9755	9589
65	7611	7489
60	6248	6150
55	5129	5093
50	4347	4322
45	3528	3618

C Range: 0 - 180DEG  
 C Interval: 22.5DEG  
 Test Speed: MEDIUM  
 Temperature: 20°C  
 Operators: ELAINE  
 Test Date: 24 October 2023


γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 3.100m [K=1.0000]  
 Remarks: AQF-G-004-2700K  
 2W / 2700K  
 24V DC



**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:23.984V I:0.0227A P:0.5439W PF:1.0000 Freq:0Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:68.1926x1 lm		
NAME: AQF-G-004-2700K	TYPE: E27 GLOBE	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: -
MFR.: AQUALUX	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0		
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%			
pw																		
pfc																		
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)											
0.0	1.08	1.08	1.08	.00	.00	.00	.85	.85	.85	.71	.71	.71	.58	.58	.58	.52		
1.0	.86	.80	.75	.79	.74	.69	.66	.62	.58	.54	.51	.48	.43	.40	.38	.33		
2.0	.72	.64	.57	.66	.59	.52	.55	.49	.44	.44	.40	.36	.34	.31	.28	.23		
3.0	.62	.52	.45	.56	.48	.41	.46	.40	.34	.37	.32	.28	.29	.25	.22	.17		
4.0	.53	.44	.36	.49	.40	.33	.40	.33	.28	.32	.27	.22	.25	.21	.17	.13		
5.0	.47	.37	.30	.43	.34	.28	.35	.28	.23	.28	.23	.18	.22	.17	.14	.10		
6.0	.41	.32	.25	.38	.29	.23	.31	.24	.19	.25	.20	.15	.19	.15	.12	.09		
7.0	.37	.28	.22	.34	.26	.20	.28	.21	.16	.23	.17	.13	.17	.13	.10	.07		
8.0	.33	.25	.19	.31	.23	.17	.25	.19	.14	.20	.15	.11	.16	.12	.08	.06		
9.0	.30	.22	.16	.28	.20	.15	.23	.17	.12	.19	.13	.10	.14	.10	.07	.05		
10.0	.27	.19	.14	.25	.18	.13	.21	.15	.11	.17	.12	.09	.13	.09	.06	.04		

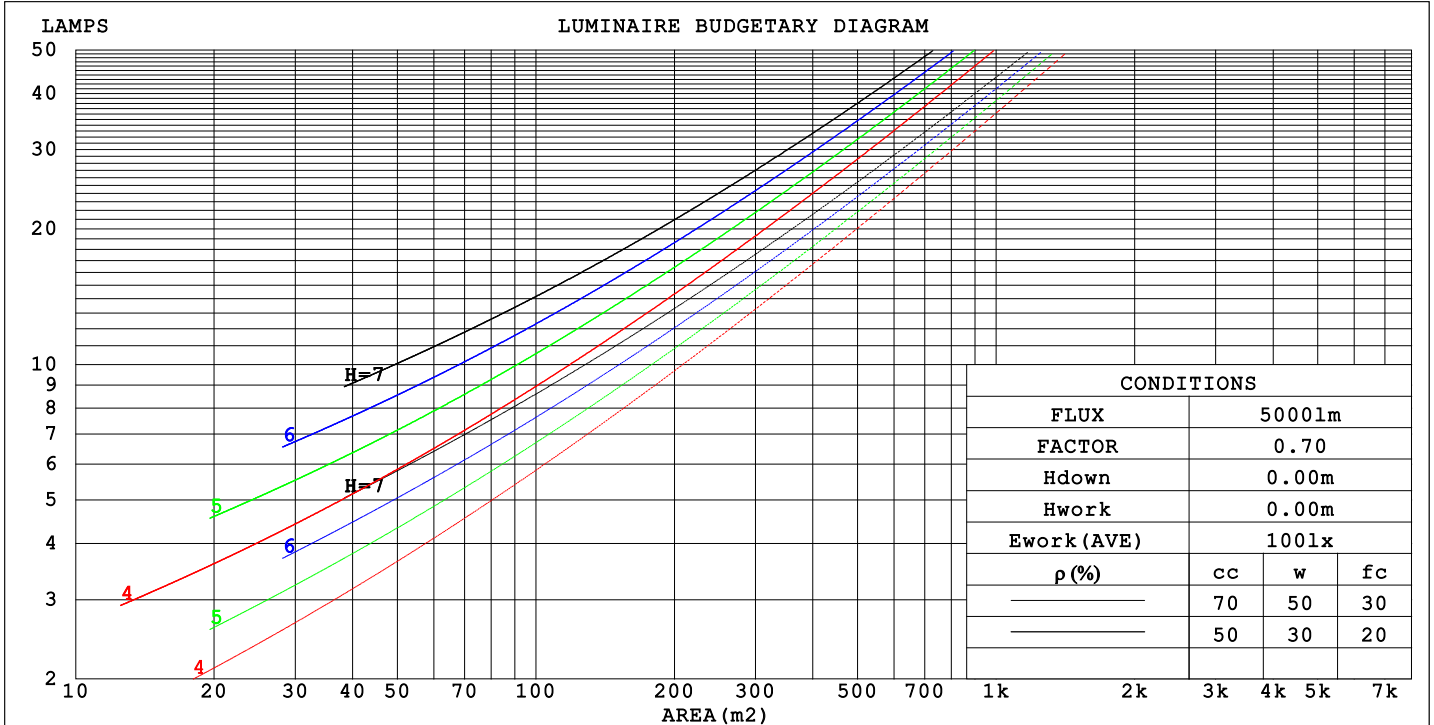

C Range: 0 - 180DEG  
 C Interval: 22.5DEG  
 Test Speed: MEDIUM  
 Temperature:20°C  
 Operators:ELAINE  
 Test Date:24 October 2023

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:3.100m [K=1.0000]  
 Remarks: AQF-G-004-2700K  
 2W / 2700K  
 24V DC

**WEC AND CCEC**

Test:U:23.984V I:0.0227A P:0.5439W PF:1.0000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:68.1926x1 lm		
NAME: AQF-G-004-2700K	TYPE: E27 GLOBE	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: -
MFR.: AQUALUX	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.432	.246	.078	.410	.234	.074	.369	.212	.068	.332	.191	.061	.297	.172	.056	
2.0	.357	.196	.060	.337	.186	.057	.300	.167	.052	.265	.149	.047	.234	.132	.042	
3.0	.310	.165	.049	.291	.156	.047	.257	.139	.042	.226	.124	.038	.196	.109	.034	
4.0	.274	.143	.042	.258	.135	.040	.226	.120	.036	.197	.106	.032	.170	.093	.028	
5.0	.247	.126	.036	.231	.119	.035	.203	.106	.031	.176	.093	.028	.151	.081	.024	
6.0	.224	.112	.032	.210	.106	.031	.184	.094	.027	.159	.083	.024	.136	.071	.021	
7.0	.206	.102	.029	.193	.096	.027	.168	.085	.024	.145	.074	.022	.123	.064	.019	
8.0	.190	.093	.026	.178	.087	.025	.155	.077	.022	.133	.068	.020	.113	.058	.017	
9.0	.176	.085	.024	.165	.080	.023	.144	.071	.020	.124	.062	.018	.105	.053	.015	
10.0	.164	.079	.022	.154	.074	.021	.134	.066	.018	.115	.057	.016	.098	.049	.014	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.554	.554	.554	.473	.473	.473	.323	.323	.323	.186	.186	.186	.059	.059	.059	
1.0	.555	.521	.491	.475	.447	.423	.325	.308	.292	.187	.178	.170	.060	.057	.055	
2.0	.550	.500	.459	.471	.431	.397	.323	.298	.277	.186	.173	.162	.060	.056	.053	
3.0	.543	.485	.439	.465	.419	.381	.319	.291	.267	.185	.170	.157	.059	.055	.052	
4.0	.535	.474	.427	.459	.409	.371	.316	.285	.261	.183	.167	.154	.059	.054	.051	
5.0	.528	.465	.418	.453	.402	.364	.312	.281	.257	.181	.165	.152	.058	.054	.050	
6.0	.521	.458	.412	.447	.396	.359	.309	.277	.254	.179	.163	.151	.058	.053	.050	
7.0	.514	.451	.408	.442	.391	.355	.305	.274	.252	.177	.162	.150	.057	.053	.050	
8.0	.507	.446	.405	.436	.387	.353	.302	.272	.250	.176	.160	.149	.057	.053	.049	
9.0	.501	.442	.402	.431	.383	.351	.299	.270	.249	.174	.159	.148	.056	.052	.049	
10.0	.495	.438	.400	.427	.380	.349	.296	.268	.248	.173	.158	.148	.056	.052	.049	

C Range: 0 - 180DEG  
 C Interval: 22.5DEG  
 Test Speed: MEDIUM  
 Temperature:20°C  
 Operators:ELAINE  
 Test Date:24 October 2023

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:3.100m [K=1.0000]  
 Remarks: AQF-G-004-2700K  
 2W / 2700K  
 24V DC

**UGR(Unified Glare Rating) Table**

Test:U:23.984V I:0.0227A P:0.5439W PF:1.0000 Freq:0Hz										
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:68.1926x1 lm										
NAME: AQF-G-004-2700K					TYPE: E27 GLOBE			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.: -		
MFR.: AQUALUX					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.8	25.9	25.6	26.8	27.9	25.3	26.4	26.2	27.3	28.4
3H	28.3	29.3	29.1	30.2	31.3	28.7	29.8	29.6	30.7	31.8
4H	30.2	31.2	31.1	32.1	33.3	30.6	31.6	31.5	32.5	33.7
6H	32.5	33.4	33.3	34.3	35.5	32.8	33.7	33.6	34.6	35.8
8H	33.7	34.6	34.6	35.5	36.7	33.9	34.8	34.8	35.7	37.0
12H	35.1	36.0	36.0	36.9	38.1	35.3	36.1	36.2	37.1	38.3
4H 2H	26.2	27.2	27.1	28.1	29.3	26.5	27.5	27.4	28.4	29.6
3H	29.6	30.4	30.5	31.4	32.6	30.0	30.9	30.9	31.8	33.0
4H	31.5	32.3	32.5	33.3	34.5	32.0	32.8	33.0	33.8	35.0
6H	33.8	34.5	34.7	35.5	36.7	34.3	35.0	35.2	35.9	37.2
8H	35.1	35.7	36.0	36.7	38.0	35.5	36.2	36.5	37.1	38.4
12H	36.6	37.2	37.6	38.2	39.5	36.9	37.5	37.9	38.5	39.8
8H 4H	32.5	33.2	33.4	34.1	35.4	32.9	33.5	33.8	34.5	35.8
6H	34.9	35.5	35.9	36.5	37.8	35.4	35.9	36.3	36.9	38.2
8H	36.3	36.8	37.3	37.8	39.1	36.8	37.3	37.8	38.3	39.6
12H	37.9	38.4	38.9	39.4	40.7	38.4	38.8	39.4	39.9	41.2
12H 4H	32.8	33.4	33.7	34.4	35.6	33.1	33.7	34.0	34.7	35.9
6H	35.3	35.8	36.3	36.9	38.2	35.7	36.2	36.7	37.2	38.5
8H	36.8	37.3	37.8	38.3	39.6	37.3	37.7	38.3	38.7	40.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.4				

CIE Pub.117, 68.19 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -9.3)  
 Area: 0.001963 m2

C Range: 0 - 180DEG  
 C Interval: 22.5DEG  
 Test Speed: MEDIUM  
 Temperature:20°C  
 Operators:ELAINE  
 Test Date:24 October 2023

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:3.100m [K=1.0000]  
 Remarks: AQF-G-004-2700K  
 2W / 2700K  
 24V DC

**UTILIZATION FACTORS TABLE**

Test:U:23.984V I:0.0227A P:0.5439W PF:1.0000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:68.1926x1 lm		
NAME: AQF-G-004-2700K	TYPE: E27 GLOBE	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: -
MFR.: AQUALUX	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	35	22	14	33	21	14	30	19	13	6
0.80	43	29	20	41	28	19	36	25	18	8
1.00	50	36	26	47	34	25	41	32	23	11
1.25	57	43	33	53	40	31	46	35	28	14
1.50	63	48	38	58	45	36	50	40	32	17
2.00	71	57	47	65	53	44	56	46	39	21
2.50	76	63	53	70	59	50	60	51	44	24
3.00	80	68	59	74	64	55	63	55	48	27
4.00	85	75	67	79	70	63	67	60	54	31
5.00	89	80	73	82	74	68	69	63	58	33
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 180DEG  
 C Interval: 22.5DEG  
 Test Speed: MEDIUM  
 Temperature:20°C  
 Operators:ELAINE  
 Test Date:24 October 2023

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 2.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:3.100m [K=1.0000]  
 Remarks: AQF-G-004-2700K  
 2W / 2700K  
 24V DC

ISOCANDELA DIAGRAM

Test:U:23.984V I:0.0227A P:0.5439W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:68.1926x1 lm		
NAME: AQF-G-004-2700K	TYPE: E27 GLOBE	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: -
MFR.: AQUALUX	SUR.:	Shielding Angle:

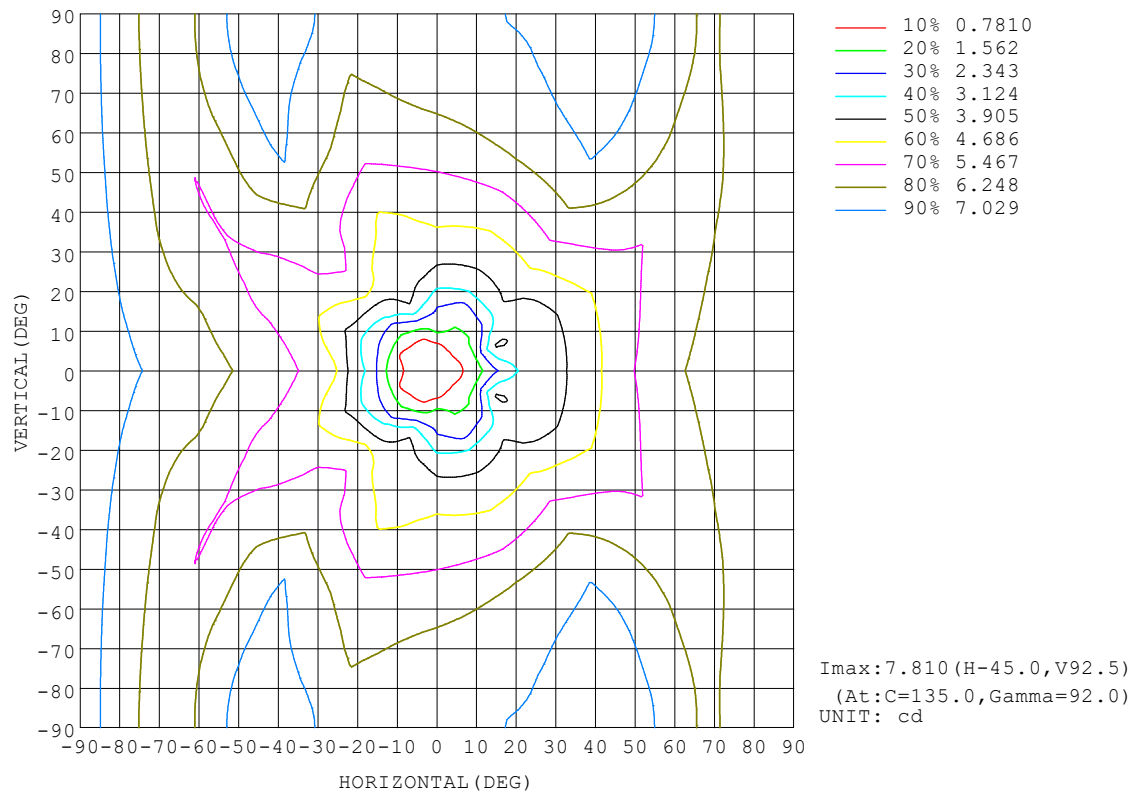


C Range: 0 - 180DEG  
 C Interval: 22.5DEG  
 Test Speed: MEDIUM  
 Temperature:20°C  
 Operators:ELAINE  
 Test Date:24 October 2023

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:3.100m [K=1.0000]  
 Remarks: AQF-G-004-2700K  
 2W / 2700K  
 24V DC

AAI CURVES

Test:U:23.984V I:0.0227A P:0.5439W PF:1.0000 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:68.1926x1 lm		
NAME: AQF-G-004-2700K	TYPE: E27 GLOBE	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: -
MFR.: AQUALUX	SUR.:	Shielding Angle:

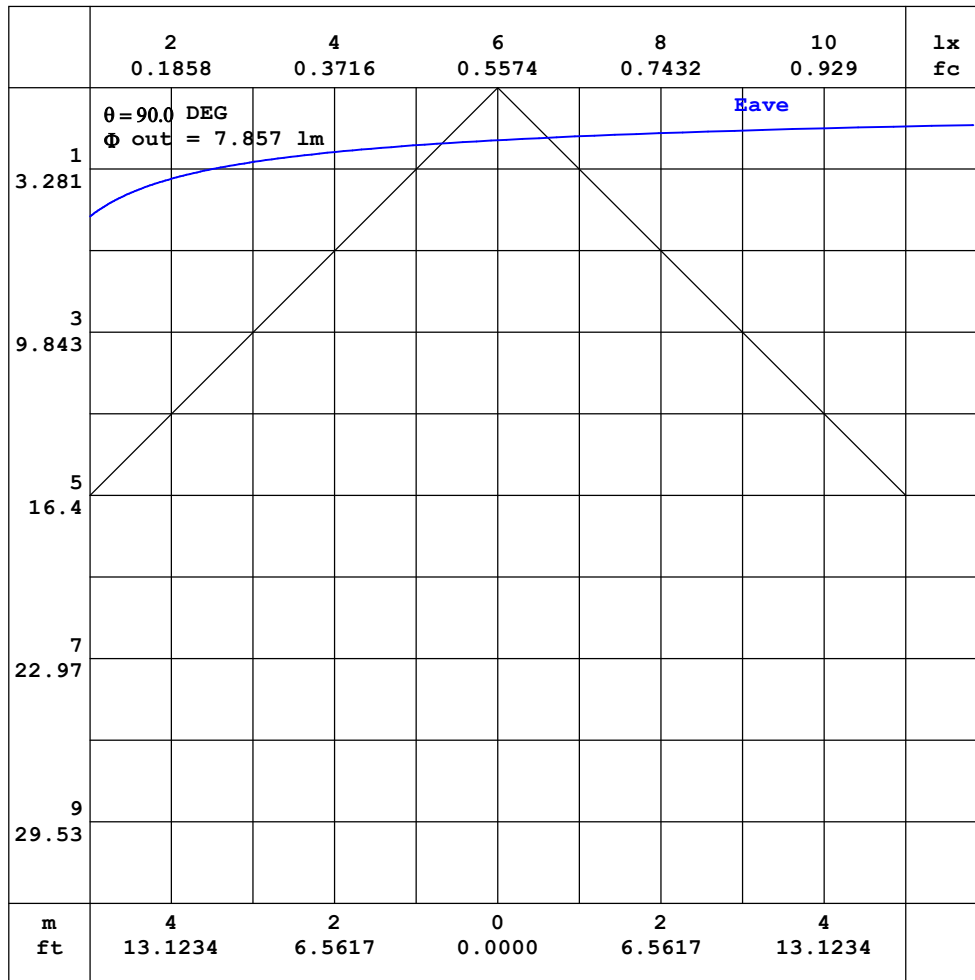


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 180DEG  
 C Interval: 22.5DEG  
 Test Speed: MEDIUM  
 Temperature: 20°C  
 Operators: ELAINE  
 Test Date: 24 October 2023

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 2.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 3.100m [K=1.0000]  
 Remarks: AQF-G-004-2700K  
 2W / 2700K  
 24V DC

ISOLUX DIAGRAM

Test:U:23.984V I:0.0227A P:0.5439W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:68.1926x1 lm		
NAME: AQF-G-004-2700K	TYPE: E27 GLOBE	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: -
MFR.: AQUALUX	SUR.:	Shielding Angle:

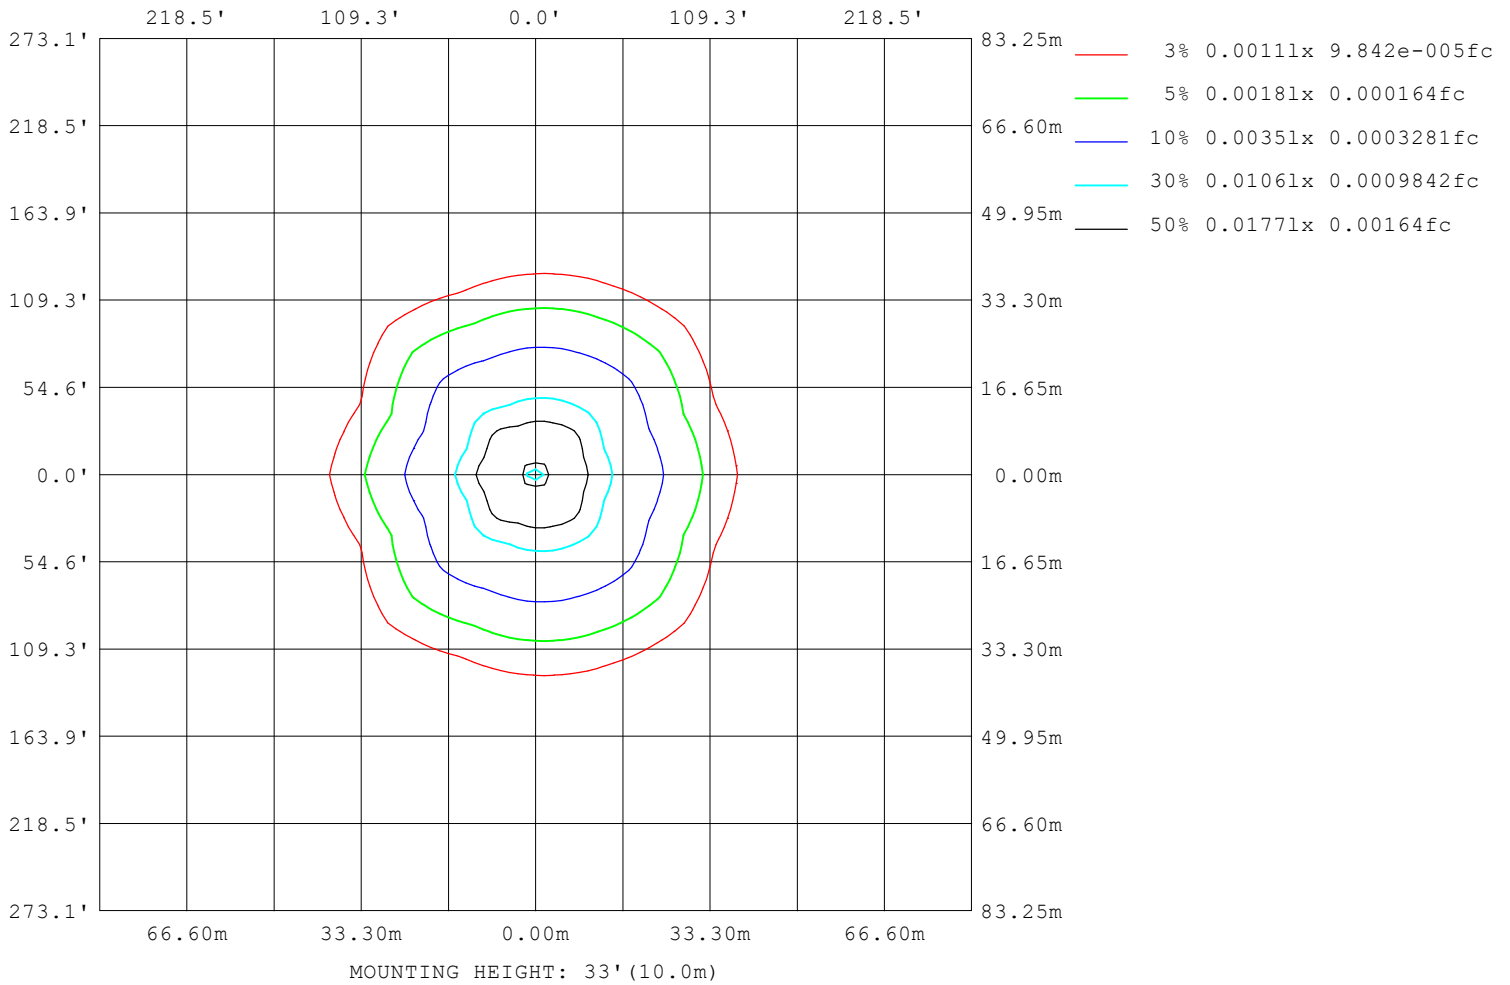

C Range: 0 - 180DEG  
 C Interval: 22.5DEG  
 Test Speed: MEDIUM  
 Temperature:20°C  
 Operators:ELAINE  
 Test Date:24 October 2023

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:3.100m [K=1.0000]  
 Remarks: AQF-G-004-2700K  
 2W / 2700K  
 24V DC

**LED Avg.L Report**

Test:U:23.984V I:0.0227A P:0.5439W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:68.1926x1 lm		
NAME: AQF-G-004-2700K	TYPE: E27 GLOBE	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: -
MFR.: AQUALUX	SUR.:	Shielding Angle:

AvgL	cd/m2
L_0~180 (65) av	7942
L_0~180 (75) av	13505
L_0~180 (85) av	41673
L_90~270 (65) av	7547
L_90~270 (75) av	12948
L_90~270 (85) av	39571
L_45 (65) av	8624
L_45 (75) av	14642
L_45 (85) av	45055


Standard: GB/T 29293-2012

C Range: 0 - 180DEG  
 C Interval: 22.5DEG  
 Test Speed: MEDIUM  
 Temperature:20°C  
 Operators:ELAINE  
 Test Date:24 October 2023

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:3.100m [K=1.0000]  
 Remarks: AQF-G-004-2700K  
 2W / 2700K  
 24V DC



Planar Illuminance Curve

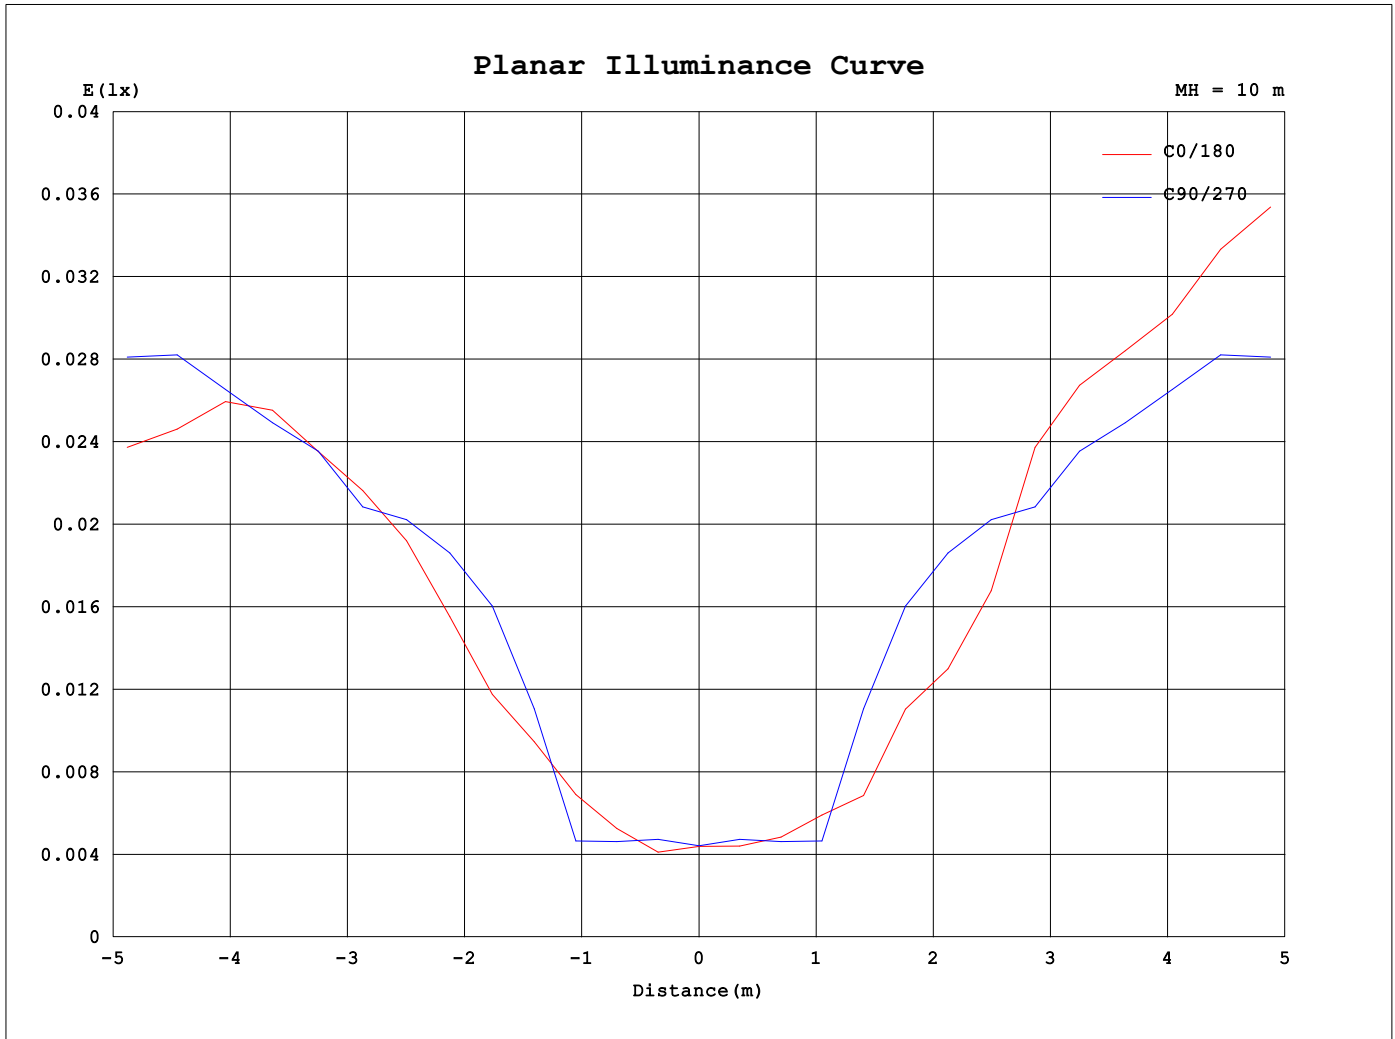

C Range: 0 - 180DEG  
 C Interval: 22.5DEG  
 Test Speed: MEDIUM  
 Temperature: 20°C  
 Operators: ELAINE  
 Test Date: 24 October 2023

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 3.100m [K=1.0000]  
 Remarks: AQF-G-004-2700K  
 2W / 2700K  
 24V DC

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.984V I:0.0227A P:0.5439W PF:1.0000 Freq:0Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:68.1926x1 lm		
NAME: AQF-G-004-2700K	TYPE: E27 GLOBE	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: -
MFR.: AQUALUX	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44			
5	0.53	0.59	0.55	0.46	0.47	0.49	0.50	0.50	0.49	0.50	0.50	0.49	0.47	0.46	0.55	0.59			
10	1.23	1.50	1.47	1.45	1.68	1.07	0.99	0.71	1.16	0.71	0.99	1.07	1.68	1.45	1.47	1.50			
15	2.10	3.26	1.75	1.79	2.22	2.53	1.78	2.04	1.84	2.04	1.78	2.53	2.22	1.79	1.75	3.26			
20	3.08	3.85	3.18	2.88	3.01	4.15	3.30	2.99	3.42	2.99	3.30	4.15	3.01	2.88	3.18	3.85			
25	3.23	3.37	3.91	3.46	3.70	4.31	4.35	3.76	4.37	3.76	4.35	4.31	3.70	3.46	3.91	3.37			
30	3.61	3.52	4.28	4.19	4.09	4.17	5.15	4.40	5.21	4.40	5.15	4.17	4.09	4.19	4.28	3.52			
35	4.02	4.00	4.66	4.46	4.49	4.33	5.51	4.85	5.41	4.85	5.51	4.33	4.49	4.46	4.66	4.00			
40	4.55	4.48	5.22	4.86	4.84	4.58	5.78	5.13	5.73	5.13	5.78	4.58	4.84	4.86	5.22	4.48			
45	4.90	4.76	5.62	5.17	5.02	4.81	5.88	5.16	5.93	5.16	5.88	4.81	5.02	5.17	5.62	4.76			
50	5.48	5.12	6.18	5.72	5.45	5.22	6.21	5.22	6.18	5.22	6.21	5.22	5.45	5.72	6.18	5.12			
55	5.77	5.32	6.52	6.07	5.73	5.44	6.48	5.31	6.39	5.31	6.48	5.44	5.73	6.07	6.52	5.32			
60	6.13	5.51	6.92	6.40	6.04	5.77	6.97	5.43	6.72	5.43	6.97	5.77	6.04	6.40	6.92	5.51			
65	6.31	5.65	7.11	6.56	6.21	5.92	7.12	5.45	6.81	5.45	7.12	5.92	6.21	6.56	7.11	5.65			
70	6.55	5.80	7.35	6.76	6.44	6.10	7.27	5.44	6.92	5.44	7.27	6.10	6.44	6.76	7.35	5.80			
75	6.65	5.89	7.46	6.85	6.56	6.20	7.37	5.50	7.02	5.50	7.37	6.20	6.56	6.85	7.46	5.89			
80	6.76	5.97	7.58	6.96	6.67	6.38	7.55	5.62	7.24	5.62	7.55	6.38	6.67	6.96	7.58	5.97			
85	6.85	6.06	7.67	7.03	6.76	6.50	7.69	5.65	7.36	5.65	7.69	6.50	6.76	7.03	7.67	6.06			
90	6.96	6.10	7.76	7.10	6.80	6.58	7.81	5.62	7.44	5.62	7.81	6.58	6.80	7.10	7.76	6.10			
95	6.94	6.06	7.77	7.11	6.76	6.56	7.81	5.58	7.44	5.58	7.81	6.56	6.76	7.11	7.77	6.06			
100	6.82	5.94	7.68	7.02	6.63	6.43	7.67	5.44	7.33	5.44	7.67	6.43	6.63	7.02	7.68	5.94			
105	6.69	5.81	7.53	6.90	6.47	6.30	7.54	5.32	7.22	5.32	7.54	6.30	6.47	6.90	7.53	5.81			
110	6.42	5.57	7.19	6.62	6.19	6.05	7.30	5.10	7.02	5.10	7.30	6.05	6.19	6.62	7.19	5.57			
115	6.22	5.39	6.95	6.38	5.98	5.84	7.08	4.92	6.83	4.92	7.08	5.84	5.98	6.38	6.95	5.39			
120	5.85	5.07	6.55	6.02	5.66	5.47	6.68	4.66	6.53	4.66	6.68	5.47	5.66	6.02	6.55	5.07			
125	5.56	4.85	6.25	5.74	5.42	5.19	6.37	4.46	6.30	4.46	6.37	5.19	5.42	5.74	6.25	4.85			
130	5.10	4.51	5.81	5.36	5.05	4.73	5.92	4.16	5.87	4.16	5.92	4.73	5.05	5.36	5.81	4.51			
135	4.81	4.28	5.49	5.11	4.75	4.42	5.62	4.04	5.54	4.04	5.62	4.42	4.75	5.11	5.49	4.28			
140	4.43	3.95	5.03	4.65	4.32	3.93	5.12	3.65	4.93	3.65	5.12	3.93	4.32	4.65	5.03	3.95			
145	4.02	3.72	4.48	4.04	3.95	3.68	4.55	3.19	4.34	3.19	4.55	3.68	3.95	4.04	4.48	3.72			
150	3.23	2.94	3.41	2.99	3.11	3.09	3.43	2.52	3.25	2.52	3.43	3.09	3.11	2.99	3.41	2.94			
155	2.43	2.35	2.70	2.39	2.58	2.46	2.57	2.15	2.25	2.15	2.57	2.46	2.58	2.39	2.70	2.35			
160	0.87	0.95	1.00	0.94	0.92	0.85	0.61	0.57	0.44	0.57	0.61	0.85	0.92	0.94	1.00	0.95			
165	0.10	0.13	0.16	0.15	0.14	0.10	0.05	0.04	0.04	0.04	0.05	0.10	0.14	0.15	0.16	0.13			
170	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02			
175	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01			
180	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			

C Range: 0 - 180DEG  
 C Interval: 22.5DEG  
 Test Speed: MEDIUM  
 Temperature:20°C  
 Operators:ELAINE  
 Test Date:24 October 2023

γ Range: 0 - 180DEG  
 γ Interval: 2.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:3.100m [K=1.0000]  
 Remarks: AQF-G-004-2700K  
 2W / 2700K  
 24V DC