


RGBW 24V DC 6 Wire PWM Dimming

7

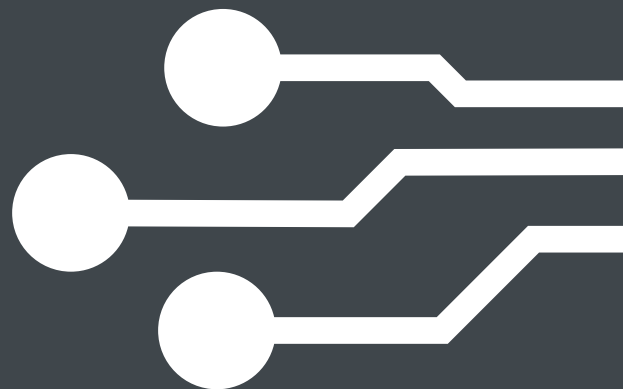

RGBW - 24V DC - 6 Wire - T4 Remote - Aqualux Driver

RGBW
24V DC
6 Wire
PWM Dimming


7



Wiring Diagram

Aqualux Codes

- AQD24-040
- AQD24-100
- AQD24-240
- AQD-400-T4CV
- AQD-400-T4

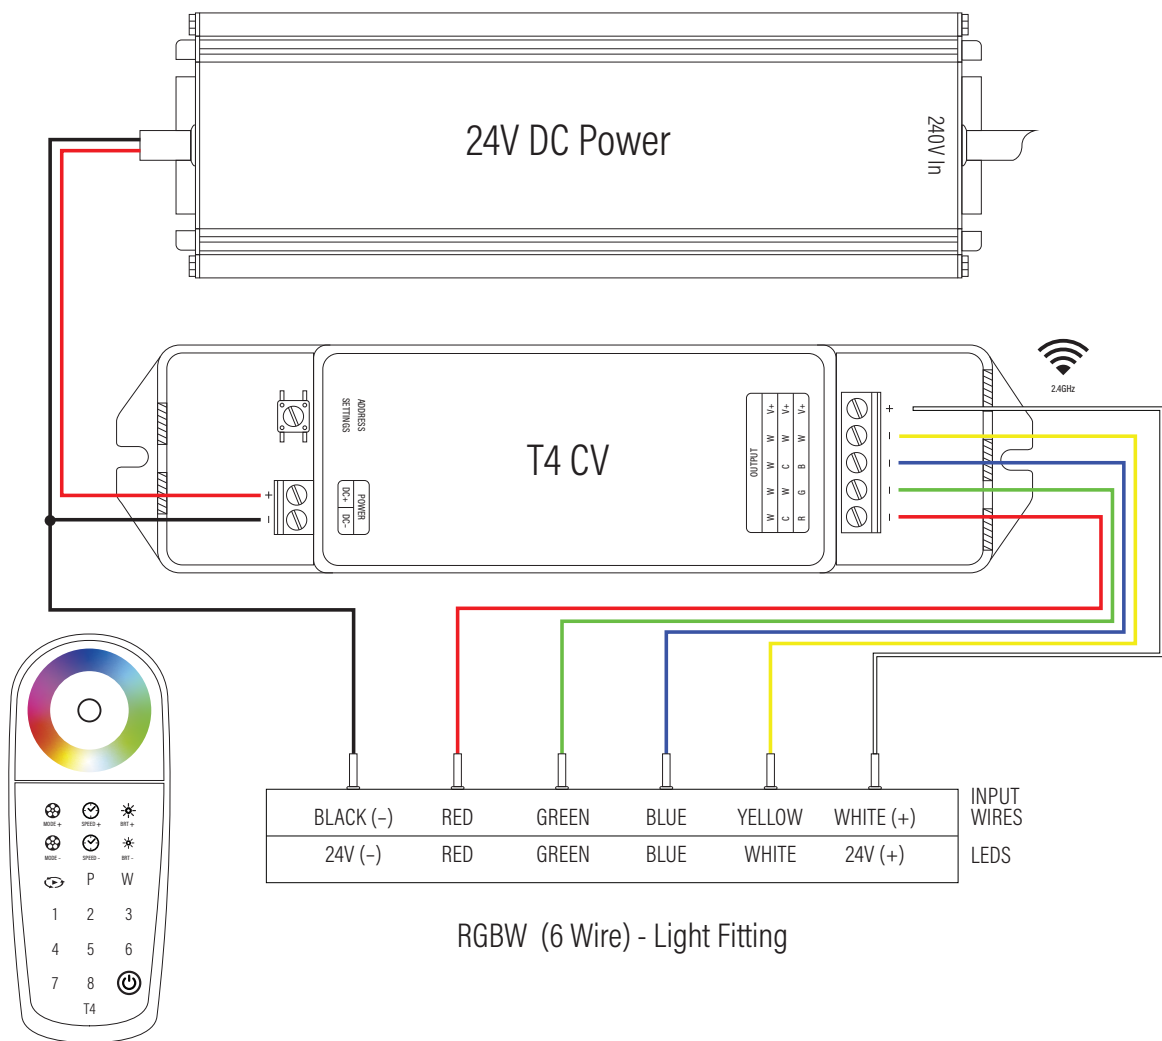

Wireless 4 channel with zoning. Max 480W 4 channel @ 24VDC. Up to 8 Zones can be controlled from T4 Remote. RF Range 30m (Line of sight). Unlimited numbers of T4CV's can be added on each zone. For installations with a load greater than the controller/receiver capacity, the yellow V + wire can be wired directly to the positive + wire from the power supply which can allow up to 600W using a HLG-600H-24 power supply.